



NOVUX™ Specialty Indexing Terminal, Fiber Indexing (SXT series), factory-sealed

- NOVUX™ Hardened Multi-fiber Terminals incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Hardened connectors are factory-integrated and environmentally sealed for use in optical drop cable deployments
- Plug and play adapter ports ensure rapid cable installment in the outside plant access section of the network
- NOVUX™ SXT terminals are available in 1 to 2 ports for Index and Branch applications
- Available with flat dielectric and flat toneable/locatable dielectric cable
- NOVUX™ smaller terminal size allowing for installation in constrained spaces
- NOVUX™ terminals are available in Black (RAL# 9005) or Gray (RAL# 7035)
- CommScope Product ID plate with QR code link to product documents and C-Track

NOVUX Specialty Terminals are designed to adapt to your application—sharing connection capabilities, a unique product information system, a mounting platform, and customer configurability. While NOVUX Specialty terminals are helping build your network, they’re building your long-term profitability, because one terminal works for all your applications in all your deployments.

The built-in mounting tabs and mounting strap features easy, direct mounting onto a strand, flat surface, pole, pedestal, or within a hand hole. Alternatively, to ease installation and maintenance, CommScope’s universal mounting bracket can be used in all mounting applications. With one common platform, installation across the series is easy and efficient and is backed by consistent documentation and training. Each NOVUX Specialty terminal comes with a QR code that allows field installers to access CommScope’s cTrak® app. With one click, cTrak provides a wealth of product information, specifications, installation instructions, videos, schematics, and test results. NOVUX Specialty terminals offer an optional customer-configurable ID plate, for ease of network recordkeeping, and clarity for multiple operators that share locations.


Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Product Type	Access terminal, without splitter/tap
Product Brand	NOVUX™
Product Series	SXT

General Specifications

Enclosure Color	Black (RAL 9005)
-----------------	------------------

Ordering Tree

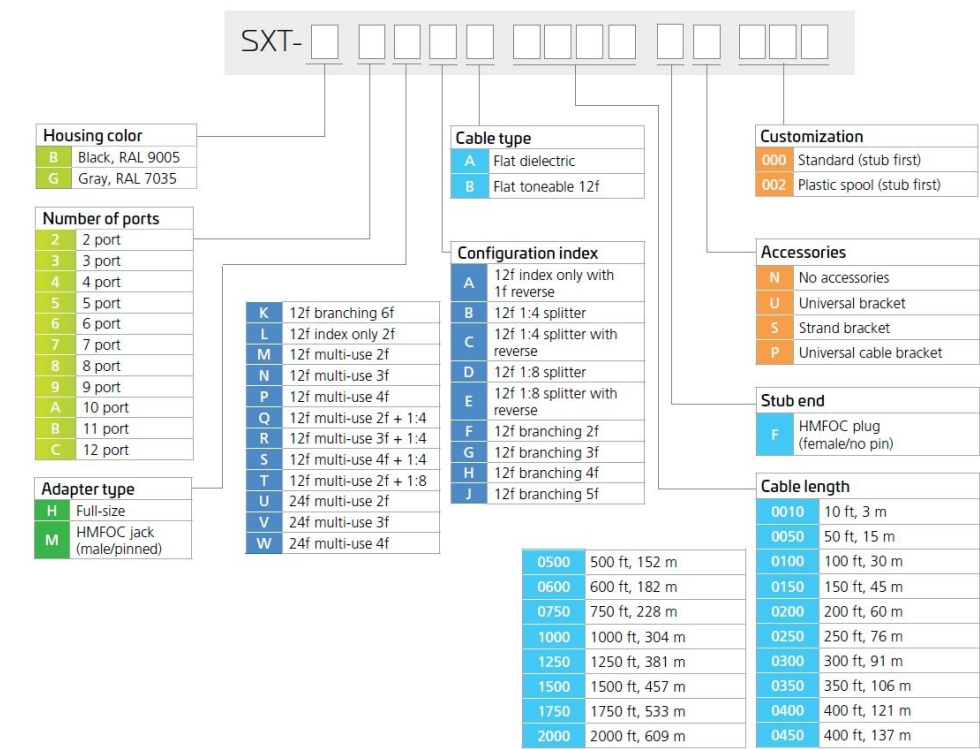

Material Specifications

Enclosure Material Type      Hardened plastic

Optical Specifications

Operating Wavelength Range      1260 – 1635 nm

Environmental Specifications

Operating Temperature      -40 °C to +65 °C (-40 °F to +149 °F)

Relative Humidity      5%–100%, condensing

Environmental Space      Above ground | Below ground

Qualification Standards      IEC 60529, IP68 + 2 m waterhead | IEC 61753-1, category G

UV Resistance      UV stabilized

Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

