



BUDI™ Fiber Optic Wall mount Enclosure, splice/patch version with 1x64 FPS splitter module

- Compact, wall mountable fiber enclosures for indoor and outdoor use
- Specifically designed for fast FTTH deployment and easy customer connection
- Available with splicing (FIST) and/or patching and/or splitter combinations
- Multiple and modular wrap around cable port sealing options

Product Classification

Regional Availability	North America
Product Type	Fiber wall box
Product Brand	BUDI™
Product Series	BUDI-M

General Specifications

Functionality	Patching   Splicing   Splitting
Access	Front
Application	Splitting
Cable Entry Location	Bottom
Distribution Type	1 x 64 splitter
Enclosure Color	Gray
Front Cover Type	Snap-on cover
Interface	SC/APC
Mounting	Wall
Port, quantity	90
Splicing Capacity, maximum	24
Splicing Type, Supported	Mass fusion
Split Ratio	Symmetrical
Splitter, quantity	1


Dimensions

Height	480 mm   18.898 in
Height, with cover	550 mm   21.654 in

760245060 | BUDI-M-TS2FPS64N-0000

Width	360 mm   14.173 in
Depth	175 mm   6.89 in

Dimension Drawing

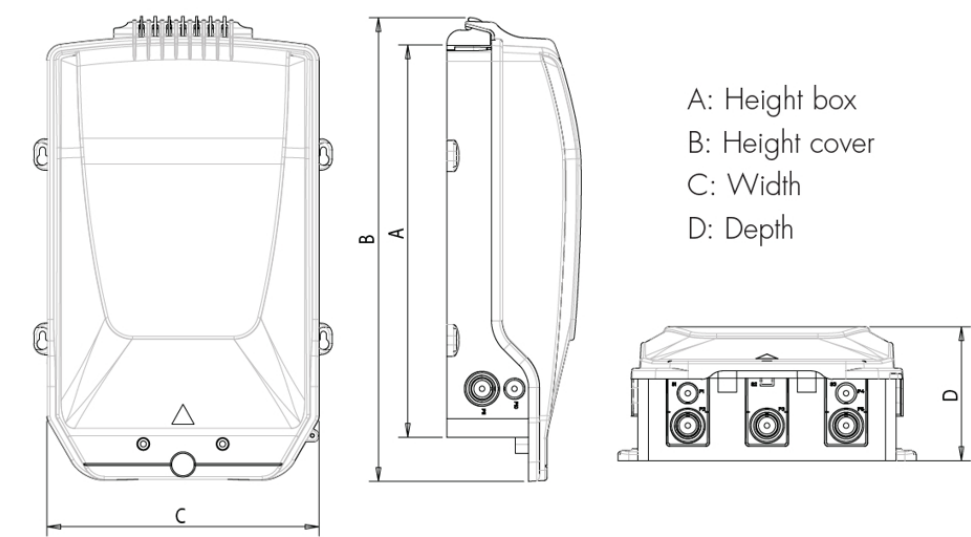

Material Specifications

Enclosure Material Type	LSZH thermoplastic
-------------------------	--------------------

Optical Specifications

Fiber Mode	Singlemode
------------	------------

Environmental Specifications

Environmental Space	Indoor/Outdoor
Qualification Standards	IEC 60529, IP54   IEC 61753-1, category G   Telcordia GR-2898-CORE

Packaging and Weights

Included	Cable seal   Splice tray
Packaging quantity	1
Packaging Type	Box   Carton

Regulatory Compliance/Certifications

Agency

CHINA-ROHS  
ROHS  
UK-ROHS

Classification

Above maximum concentration value  
Compliant/Exempted  
Compliant/Exempted

