760245062 | BUDI-M-TS2FPS64G-0300



BUDI™ Fiber Optic Wall mount Enclosure, Pre-terminated version with 1x64 FPS splitter module and 300ft I/O OFNR cable stub

- Compact, wall mountable fiber enclosures for indoor and outdoor use
- Specifically designed for fast FTTH deployment and easy customer connection
- Available with splicing (FIST) and/or patching and/or splitter combinations
- Multiple and modular wrap around cable port sealing options

Product Classification

Regional AvailabilityNorth AmericaProduct TypeFiber wall box

Product Brand BUDI™ Product Series BUDI-M

General Specifications

Functionality Patching | Splicing | Splitting

AccessFrontApplicationSplittingCable Entry LocationBottom

Cable TypeIndoor - RibbonDistribution Type1 x 64 splitter

Enclosure Color Gray

Front Cover Type Snap-on cover

InterfaceSC/APCMountingWallPort, quantity90

Splicing Capacity, maximum 24

Splicing Type, Supported Mass fusion
Split Ratio Symmetrical

Splitter, quantity 1

Dimensions

Height 480 mm | 18.898 in



760245062 | BUDI-M-TS2FPS64G-0300


 Height, with cover
 550 mm | 21.654 in

 Width
 360 mm | 14.173 in

 Depth
 175 mm | 6.89 in

 Cable Length
 91.44 m | 300 ft

Dimension Drawing

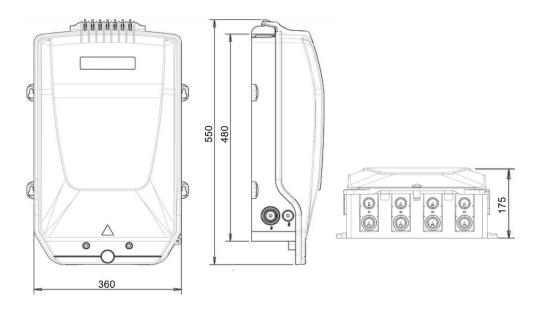

Material Specifications

Enclosure Material TypeLSZH thermoplastic

Optical Specifications

Fiber Mode Singlemode

Environmental Specifications

Environmental Space Indoor/Outdoor

Qualification Standards IEC 60529, IP54 | IEC 61753-1, category G | Telcordia GR-2898-CORE

Packaging and Weights

Included Cable seal | Splice tray

Packaging quantity 1

Packaging Type Box | Carton

COMMSCOPE®

760245062 | BUDI-M-TS2FPS64G-0300

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

