CCJRG | IP6A-24LUTP-PG2H-1100E

Base Product



InstaPATCH® Cu GigaSPEED X10D® U/UTP LSZH Preterminated Copper Cable, dual row high density RJ45 plug to 360 1100 Evolve module, 24 links

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio CommScope®

Product Type Copper trunk cable assembly

Product Brand GigaSPEED X10D® | InstaPATCH® Cu

General Specifications

ANSI/TIA Category 6A

Cable Type U/UTP (unshielded)

Conductor Type Solid

Interface, Connector A RJ45 plug

Interface Feature, connector ADual rowHigh densityInterface, Connector B360 1100 Evolve module

Interface Feature, connector B Standard

Link Count 24

Wiring T568B

Dimensions

Cable Assembly Length Range (m)2-30Cable Assembly Length Range (ft)7-98


Electrical Specifications

dc Resistance, maximum0.3 ohmSafety Voltage Rating300 V

Ordering Tree



CCJRG | IP6A-24LUTP-PG2H-1100E

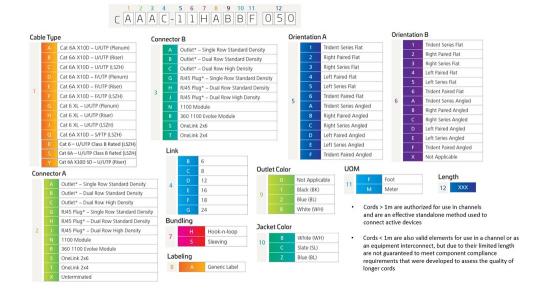

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C} \text{ to } +60 \,^{\circ}\text{C} \text{ (+14 °F to +140 °F)}$

Environmental Space Low Smoke Zero Halogen (LSZH)

Flammability Rating UL 94 V-0

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

Included Products

3095B-4/24 – GigaSPEED X10D® 3095B Category 6A U/UTP Cable, non-plenum, 4 pair count

760151183 - SYSTIMAX 360™ GigaSPEED X10D® 1100GS6 Evolve Category 6A U/UTP Distribution Module, 6 port

