

Fiber drop cable, LightScope ZWP® Self-Supporting Non-Armored Figure-8, Singlemode G.652.D and G.657.A1, 2 fiber Arid Core construction with 0.064 in solid messenger, Gel-filled, central loose tube, Feet jacket marking, Black jacket color

OBSOLETE

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber drop cable
Product Series	M-MN


General Specifications

Cable Type	Central loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Meters
Subunit, quantity	1
Fibers per Subunit, quantity	2
Total Fiber Count	2

Dimensions

Height Over Jacket	9 mm 0.354 in
Buffer Tube/Subunit Diameter	2.5 mm 0.098 in
Diameter Over Jacket	3.8 mm 0.15 in
Diameter Over Messenger Jacket	4 mm 0.157 in

Representative Image

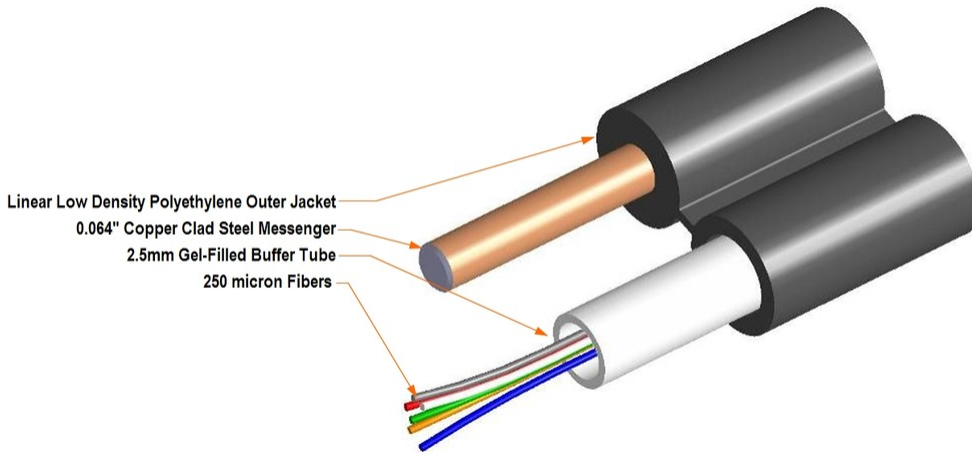

Material Specifications

Jacket Material PE

Mechanical Specifications

Minimum Bend Radius, loaded 56 mm | 2.205 in
Minimum Bend Radius, unloaded 38 mm | 1.496 in
Tensile Load, long term, maximum 400 N | 89.924 lbf
Tensile Load, short term, maximum 1334 N | 299.895 lbf
Compression 10 N/mm | 57.101 lb/in
Compression Test Method FOTP-41 | IEC 60794-1 E3
Flex 35 cycles
Flex Test Method FOTP-104 | IEC 60794-1 E6
Impact 0.74 N-m | 6.55 in lb
Impact Test Method FOTP-25 | IEC 60794-1 E4
Strain See long and short term tensile loads
Strain Test Method FOTP-33 | IEC 60794-1 E1
Twist 10 cycles
Twist Test Method FOTP-85 | IEC 60794-1 E7
Vertical Rise, maximum 1042 m | 3,418.635 ft

Optical Specifications

Fiber Type G.652.D and G.657.A1 | G.652.D and G.657.A1

Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-110-717
Environmental Space	Aerial, self-support Buried
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze	-2 °C 28.4 °F
Cable Freeze Test Method	FOTP-98 IEC 60794-1 F15
Drip	70 °C 158 °F
Drip Test Method	FOTP-81 IEC 60794-1 E14
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	39 kg/km 26.207 lb/kft
---------------------	--------------------------

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



Included Products

DB-8W-LT – LightScope ZWP® Singlemode

Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable