REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REV ECO-13-020261	02JAN2016	GG	MK
	L	REV PER BNS_CD_BRAND	20JAN2017	GG	DC

FINISHED WIRE DATA		
CONDUCTORS	WIRE AWG	24 AWG SOLID
	MATERIAL	SOLID BARE COPPER ⚠1
INSULATION	MATERIAL	HIGH DENSITY POLYETHYLENE ⚠1
JACKET	MATERIAL	FR PVC ⚠1

COLOR CODE

PAIR	COLOR CODE
1	WHT-BLU
2	WHT-ORG
3	WHT-GRN
4	WHT-BRN

⚠1 MATERIALS ARE SELECTED BASED ON THEIR ABILITY TO CONFORM TO UL 444 LATEST ISSUE.

2. CABLE SHALL BE CAPABLE OF WITHSTANDING 1500 VRMS BETWEEN OUTER SURFACE AND CONDUCTORS.

3. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.

4. GOVERNING SPECIFICATIONS – LATEST REVISIONS
NEC 800 (US)/CEC 60-322 (CANADA)
UL 444 – CMH (CANADA) / CMUC (US)

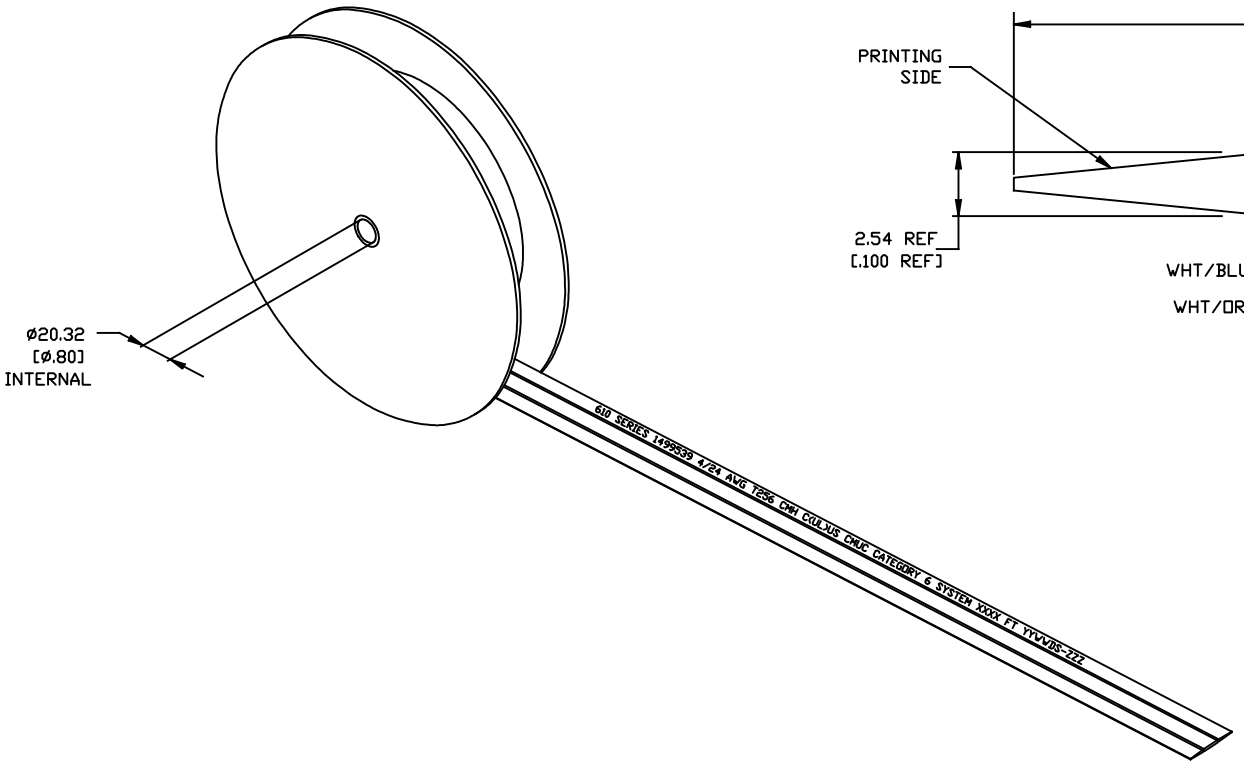

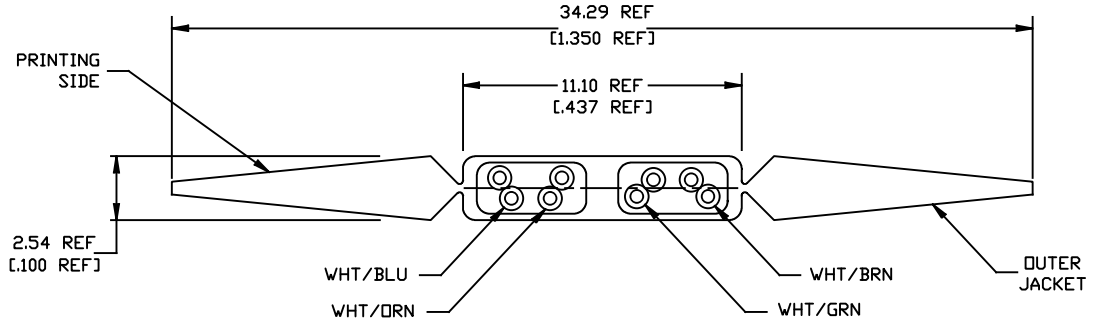

CABLE CROSS SECTION
SCALE 10: 1

CATALOG NUMBER	FEET PER ROLL	PART NUMBER
TE610UC-WT100	100 +1/-0	1499539-5
TE610UC-WT250	250 +5/-0	1499539-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRN L. HALL 19APR2007
CHK J. GENIAC 23APR2007
APVD J. GENIAC 23APR2007
PRODUCT SPEC IS 408-3194
APPLICATION SPEC 108-2374 501-691

COMMSCOPE, INC.

NAME CABLE, 4 UTP, 24AWG, CAT 6 SYSTEM, CMUC

SIZE A1 | CAGE CODE – | DRAWING NO C-1499539 | RESTRICTED TO –

WEIGHT | CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV L