


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© 2016 COMMSCOPE, INC. CONFIDENTIAL NOTICE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPRIETARY PROPERTY OF COMMSCOPE, INC. AND MAY BE USED ONLY FOR THE SPECIFIC PURPOSE AUTHORIZED IN WRITING BY COMMSCOPE, INC.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ISSUED	26-Jan-08	JG	JS
	B	ECR-09-003785	18-Feb-09	JG	JS
	C	REV PER BNS_CD_BRAND	03FEB2017	GG	DC

1. RJ45 to 2 PAIR PLUG ACC. TO IEC 61076-3-104 PATCH CABLE ASSEMBLIES FOR 10/100 ETHERNET APPLICATION ARE USED AS HYBRID PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.

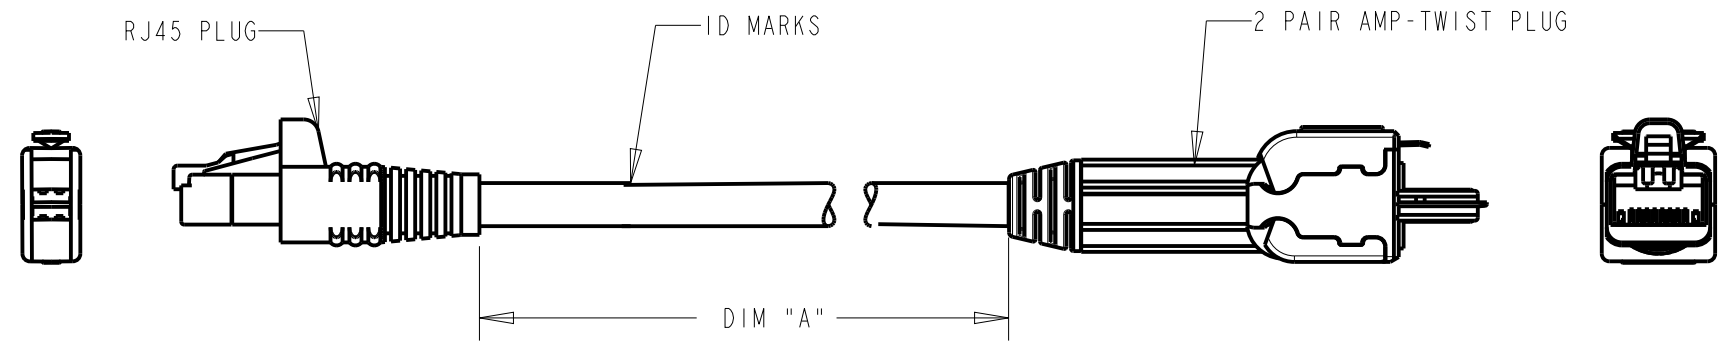

DRAWING SCHEMATIC

2-1711613-0	20000-20050	20
1-1711613-5	15000-15050	15
1-1711613-0	10000-10050	10.0
1-1711613-4	7500 - 7550	7.5
1711613-5	5000 - 5050	5.0
1711613-3	3000 - 3050	3.0
1711613-2	2000 - 2050	2.0
1-1711613-2	1500 - 1550	1.5
1711613-1	1000 - 1050	1.0
1-1711613-1	500 - 550	0.5
TE P/N	DIM "A"	METERS, REF
PART NUMBER INFO		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. GATNAU 26-Sep-08	<b>COMMSCOPE, INC.</b>		
DIMENSIONS: mm		CHK M. MAQUEDA 30-Sep-08			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. SANABRA 30-Sep-08	NAME RJ45/2pr AMP-TWIST PLUG PATCH CABLE ASSY PIMF1200MHZ ETHERNET PINOUT (1236),LSZH,STRD		
0 PLC ±-		PRODUCT SPEC 108-93024	SIZE A3	CAGE CODE C-1711613	RESTRICTED TO -
1 PLC ±-		APPLICATION SPEC -	SCALE -	SHEET 1	OF 1
2 PLC ±-		WEIGHT -	REV C		
3 PLC ±-		CUSTOMER DRAWING			
4 PLC ±-					
ANGLES ±-					
MATERIAL -					
FINISH -					