THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© 2016 CommScope, Inc. Confidential

REVISIONS					
P	LTR	DESCRIPTION	DATE	BY	APVD
	R2	REVISED PER ECO-12-021923	18DEC2012	GG	MS
	T	REV PER BNS_CD_BRAND	19JAN2017	GG	DC

1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: POLYESTER FILM 0.025 [.010] THICK. 2 LAYERS EACH SIDE.
   COPPER WIRE– 0.23 [.009] THICK x 15.24 [.600] WIDE.
   SHIELD– PVC, 0.025 [.010] THICK.
3. CABLE MARKED WITH " PN 553079
   TYPE FCC UL CSA 12 AWG, CU 300V, 20 AMP 60$C"
   IN COLOR SPECIFIED FOR CONTINUOUS LENGTH OF ROLL AS SHOWN.
4. CAUTION: THE UNDERCARPET CABLE MAY NOT BE USED OUTDOORS OR IN WET LOCATIONS; WHERE THE CABLE WOULD BE SUBJECT TO CORROSIVE VAPORS; IN ANY HAZARDOUS (CLASSIFIED) LOCATION; OR IN RESIDENTIAL, SCHOOL, AND HOSPITAL BUILDINGS.

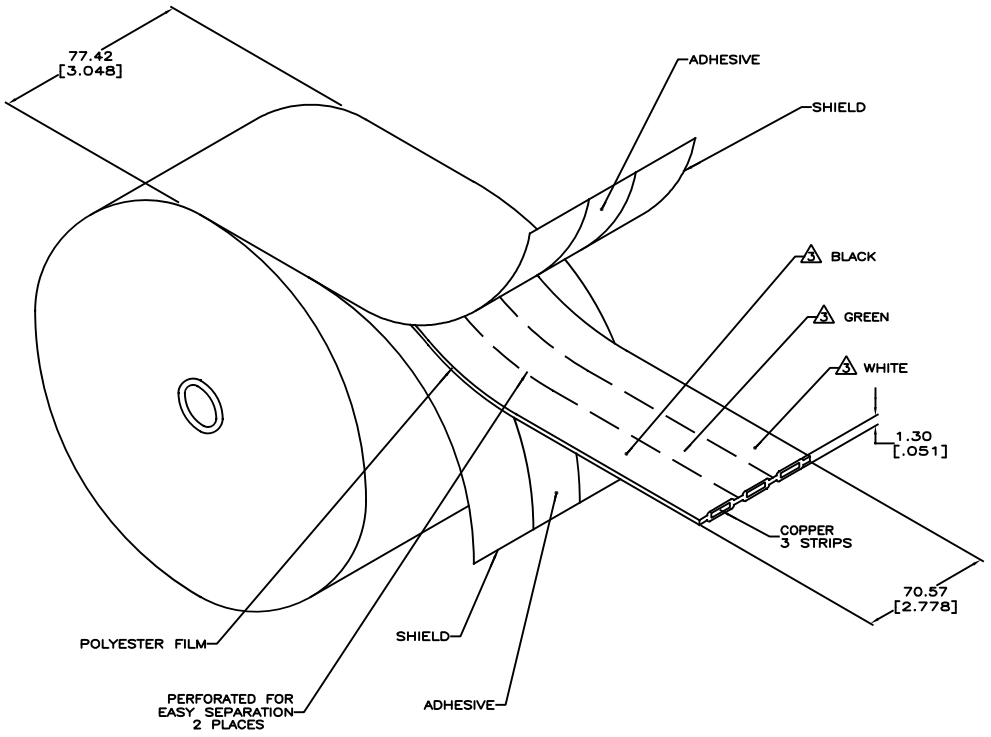

LENGTH PER REEL – M [FEET]	PART NO.
30.7 [100]	3–553079–4
15.5 [50]	3–553079–3
76.5 [250]	3–553079–1
9.14 [30]	1–553079–7

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRN L. HALL 31AUG2005
CHK R. SPEER 31AUG2005
APVD R. SPEER 31AUG2005
PRODUCT SPEC 108–6038
APPLICATION SPEC 114–6008
WEIGHT –

COMMSCOPE, INC.

NAME CABLE, FLAT, 3 CONDUCTOR, 12 AWG, POWER, UNDERCARPET –

SIZE A1 | CAGE CODE – | DRAWING NO C–553079 | RESTRICTED TO –

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV T