

Twin Inband Diplexer PCS A5-D, DC sense

#### **OBSOLETE**

#### Replaced By:

CHB626-43-2X D15T01P38

Twin Hybrid Combiner

#### **Product Classification**

Product Type Diplexer

General Specifications

**Color** Gray

**Connector Interface** 7-16 DIN Female


**Dimensions** 


 Height
 465 mm | 18.307 in

 Width
 365 mm | 14.37 in

 Depth
 90 mm | 3.543 in

### Outline Drawing

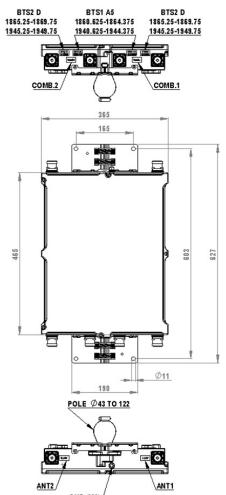





**5th Order IMD Test Method** Two +43 dBm carriers

**5th Order IMD, maximum** -153 dBc

Electrical Specifications, Rx (Uplink)

**Frequency Band** 1860.625 – 1864.375 MHz

Insertion Loss, typical0.8 dBReturn Loss, typical18 dBIsolation, minimum28 dBTotal Group Delay, maximum250 ns



### Electrical Specifications 2, Rx (Uplink)

**Frequency Band** 1865.25 – 1869.75 MHz

Isolation, minimum28 dBIsolation, typical28 dBTotal Group Delay, maximum250 nsInsertion Loss, typical0.8 dB

## Electrical Specifications, Tx (Downlink)

**Frequency Band** 1940.625 – 1944.375 MHz

Isolation, minimum28 dBIsolation, typical28 dBInput Power, PEP, maximum3000 WInput Power, RMS, maximum100 WTotal Group Delay, maximum250 nsInsertion Loss, typical0.8 dBReturn Loss, typical18 dB

#### Electrical Specifications 2, Tx (Downlink)


**3rd Order IMD Test Method** Two +43 dBm carriers

**Frequency Band** 1945.25 – 1949.75 MHz

Input Power, PEP, maximum3000 WInsertion Loss, typical0.8 dBIsolation, minimum28 dBIsolation, typical28 dBReturn Loss, minimum18 dBReturn Loss, typical18 dB

### Block Diagram



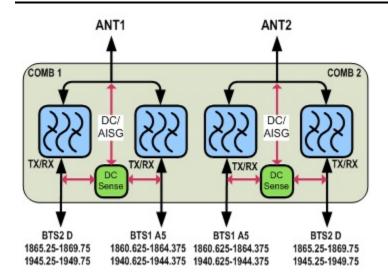

#### **Environmental Specifications**

**Operating Temperature**  $-40 \,^{\circ}\text{C} \text{ to } +65 \,^{\circ}\text{C} \left(-40 \,^{\circ}\text{F to } +149 \,^{\circ}\text{F}\right)$ 

Ingress Protection Test Method IEC 60529:2001, IP67

Packaging and Weights

**Weight, net** 15.8 kg | 34.833 lb