

FFHHTTVV-65A-R8



16-port sector antenna, 4x 617-894, 4x1695-2200, 4x2490-2690 and 4x1695-2690 MHz, 65° HPBW, 8x RET

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Antenna shape optimized for wind load reduction

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	12
RF Connector Quantity, low band	4
RF Connector Quantity, total	16

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	High band (6) Low band (2)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)


Dimensions

Width	498 mm 19.606 in
--------------	--------------------

FFHHTTVV-65A-R8

Depth 197 mm | 7.756 in
Length 1499 mm | 59.016 in
Net Weight, antenna only 35 kg | 77.162 lb

Array Layout

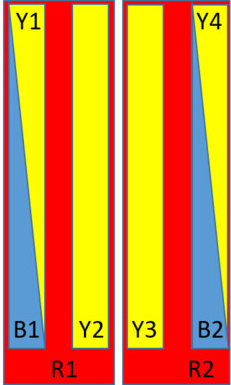

Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
R1	617-894	1-2	1	CPxxxxxxxxxxxxR1
R2	617-894	3-4	2	CPxxxxxxxxxxxxR2
B1	1695-2200	5-6	3	CPxxxxxxxxxxxxB1
B2	1695-2200	7-8	4	CPxxxxxxxxxxxxB2
Y1	2490-2690	9-10	5	CPxxxxxxxxxxxxY1
Y2	1695-2690	11-12	6	CPxxxxxxxxxxxxY2
Y3	1695-2690	13-14	7	CPxxxxxxxxxxxxY3
Y4	2490-2690	15-16	8	CPxxxxxxxxxxxxY4

Left Bottom Right

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration



Electrical Specifications

Impedance 50 ohm
Operating Frequency Band 1695 – 2200 MHz | 1695 – 2690 MHz | 2490 – 2690 MHz | 617 – 894 MHz
Polarization ±45°

FFHHTTVV-65A-R8

Total Input Power, maximum

1,400 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2	B1,B2	B1,B2	Y1,Y4	Y2,Y3	Y2,Y3	Y2,Y3
Frequency Band, MHz	617-698	698-894	1695-1990	1920-2200	2490-2690	1695-1990	1920-2200	2300-2690
RF Port	1,2,3,4	1,2,3,4	5,6,7,8	5,6,7,8	9,10,15,16	11,12,13,14	11,12,13,14	11,12,13,14
Gain, dBi	12.7	13.3	16.2	16.5	16.7	16.5	17.4	17.4
Beamwidth, Horizontal, degrees	71	60	65	63	55	60	58	55
Beamwidth, Vertical, degrees	18.1	15.4	6.2	5.8	5	6.5	6	5.2
Beam Tilt, degrees	4-18	4-18	2-12	2-12	2-12	2-12	2-12	2-12
USLS (First Lobe), dB	18	17	15	16	20	17	19	18
Front-to-Back Ratio at 180°, dB	32	30	32	32	26	33	35	33
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	250	250	200	200	200	200	200	200

Electrical Specifications, BASTA

	617-698	698-894	1695-1990	1920-2200	2490-2690	1695-1990	1920-2200	2300-2690
Frequency Band, MHz	617-698	698-894	1695-1990	1920-2200	2490-2690	1695-1990	1920-2200	2300-2690
Gain by all Beam Tilts, average, dBi	12.3	12.8	15.7	16.2	16	16.1	16.9	17
Gain by all Beam Tilts Tolerance, dB	±0.7	±0.8	±0.7	±0.5	±0.8	±0.8	±0.6	±0.6
Beamwidth, Horizontal Tolerance, degrees	±9	±9	±6	±6	±5	±5	±6	±8
Beamwidth, Vertical Tolerance, degrees	±1.6	±2.1	±0.4	±0.4	±0.3	±0.5	±0.5	±0.4
USLS, beampeak to 20° above beampeak, dB			13	14	13	15	15	15
Front-to-Back Total Power at 180° ± 30°, dB	20	21	23	23	19	28	28	28
CPR at Boresight, dB	16	16	20	21	16	17	21	19
CPR at Sector, dB	8	7	5	6	4	8	9	6

FFHHTTVV-65A-R8

Mechanical Specifications

Wind Loading @ Velocity, frontal	510.0 N @ 150 km/h (114.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	133.0 N @ 150 km/h (29.9 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	677.0 N @ 150 km/h (152.2 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	351.0 N @ 150 km/h (78.9 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	309 mm 12.165 in
Length, packed	1686 mm 66.378 in
Weight, gross	47.9 kg 105.601 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

- BSAMNT-3 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance

BSAMNT-3



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.2 kg | 13.669 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Weight, gross 6.4 kg | 14.11 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

BSAMNT-3

