

Ultra Low Loss (ULL) Singlemode MPO8 (Non-Pinned) to unconnectorized, Fiber Trunk Cable Assembly, 96-Fiber, Dual Rated (OFNR/LSZH)

Product Classification


Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	Propel SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Connector A, quantity	12
Color, boot A	Gray
Color, connector A	Green
Connector B, quantity	0
Construction Type	Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-08/APC Female
Interface, Connector B	Unterminated
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	8
Total Fibers, quantity	96

Dimensions

Breakout Length	22 in
Cable Assembly Length Range (m)	3 – 305
Cable Assembly Length Range (ft)	10 – 999

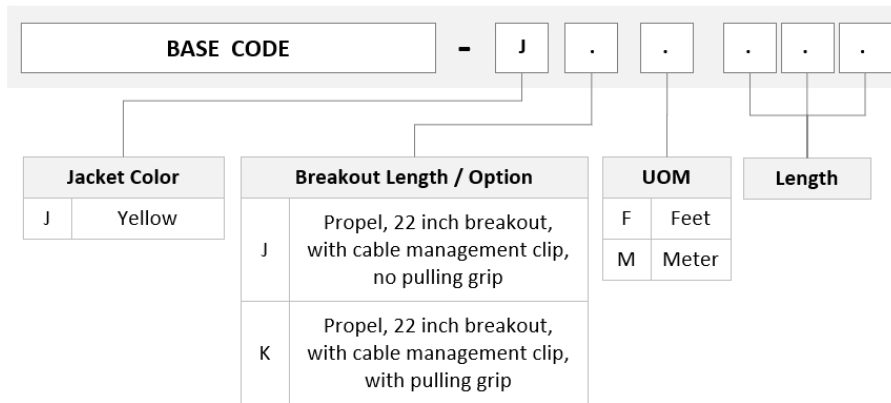

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 ° 4.40 lb @ 90 °
--	---------------------------------

Optical Specifications

Fiber Mode Singlemode

Fiber Type	G.657.A2, TeraSPEED®
-------------------	----------------------

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Dual Rated LSZH/Riser | Indoor

Regulatory Compliance/Certifications

Agency

ANATEL

ISO 9001:2015



Classification

Compliant

Designed, manufactured and/or distributed under this quality management system.

Included Products

760245575	-	Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 96 fiber multi-unit with 8 fiber
N-096-MP-8G1-F08YL/20T/D		2.0 mm subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, Dca flame

UJGQPUCTL

860659028	rating
-	MPO-08, ULTRA LOW LOSS, FEMALE, Singlemode, GREEN, 2mm