


UQXMPMPUD



Ultra Low Loss (ULL) OM4 MPO12 (Non-Pinned) to MPO12 (Non-Pinned), Fiber Array Cable Assembly, 12-Fiber, Plenum

Product Classification

| | |
|------------------------------|--|
| Regional Availability | Asia Australia/New Zealand Europe Latin America Middle East /Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber array cable assembly |
| Product Brand | Propel SYSTIMAX ULL |
| Ordering Note | For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration |

General Specifications


| | |
|-------------------------------------|-------------------------|
| Connector A, quantity | 1 |
| Color, boot A | Black |
| Color, connector A | Aqua |
| Connector B, quantity | 1 |
| Color, boot B | Black |
| Color, connector B | Aqua |
| Construction Type | Stranded |
| Furcation Color | Aqua |
| Interface, Connector A | MPO-12/UPC Female |
| Interface, Connector B | MPO-12/UPC Female |
| Jacket Color | Aqua |
| Polarity | Method B Enhanced (ULL) |
| Fibers per Subunit, quantity | 12 |
| Total Fibers, quantity | 12 |

Dimensions

| | |
|---|---------|
| Cable Assembly Length Range (m) | 1 – 305 |
| Cable Assembly Length Range (ft) | 3 – 999 |

UQXMPMPUD

Ordering Tree

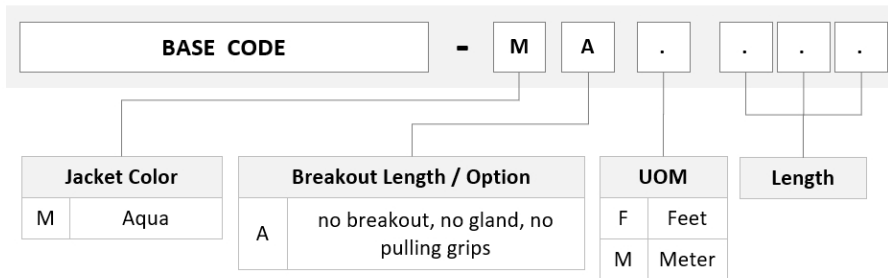

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ANATEL | Compliant |
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



Included Products

760242035 - Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 12 fiber, Multimode
 P-012-MP-5K-F20AQ

UQXMPMPUD

860659012 - OM4, Feet jacket marking, Aqua jacket color
MPO12, ULL, FEMALE, OM3/4, AQUA, 2MM