

# JAHH-33C-R3B



8-port sector antenna, 2x 698–798, 2x 824–894 and 4x 1695–2360 MHz, 33° HPBW, low bands each have a RET and high bands share a RET. Internal SBT for low band and internal SBT for high band.

- Internal SBT on low and high band allow remote RET control from the radio over the RF jumper cable
- One RET for 700MHz, one RET for 850MHz, and one RET for both high bands to ensure same tilt level for 4x Rx or 4x MIMO
- Internal filter on low band and interleaved dipole technology providing for attractive, low wind load mechanical package
- Separate RS-485 RET input/output for low and high band
- Narrow beamwidth capacity antenna for higher level of densification and enhanced data throughput

## General Specifications

|   |  |
|---|--|
| <b>Antenna Type</b>                     | Sector   |
| <b>Band</b>                             | Multiband  |
| <b>Grounding Type</b>                   | RF connector body grounded to reflector and mounting bracket   |
| <b>Performance Note</b>                 | Outdoor usage   Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN |
| <b>Radome Material</b>                  | Fiberglass, UV resistant   |
| <b>Radiator Material</b>                | Aluminum   Low loss circuit board  |
| <b>Reflector Material</b>               | Aluminum   |
| <b>RF Connector Interface</b>           | 4.3-10 Female  |
| <b>RF Connector Location</b>            | Bottom   |
| <b>RF Connector Quantity, high band</b> | 4  |
| <b>RF Connector Quantity, low band</b>  | 4  |
| <b>RF Connector Quantity, total</b>     | 8  |

## Remote Electrical Tilt (RET) Information

|                                |                                   |
|--------------------------------|-----------------------------------|
| <b>RET Interface</b>           | 8-pin DIN Female   8-pin DIN Male |
| <b>RET Interface, quantity</b> | 2 female   2 male                 |
| <b>Input Voltage</b>           | 10–30 Vdc                         |
| <b>Internal Bias Tee</b>       | Port 1   Port 5                   |
| <b>Internal RET</b>            | High band (1)   Low band (2)      |


# JAHH-33C-R3B

|  |                            |
|--|----------------------------|
| <b>Power Consumption, idle state, maximum</b>        | 1 W                        |
| <b>Power Consumption, normal conditions, maximum</b> | 8 W                        |
| <b>Protocol</b>                                      | 3GPP/AISG 2.0 (Single RET) |

## Dimensions

|   |                     |
|---|---------------------|
| <b>Width</b>                            | 640 mm   25.197 in  |
| <b>Depth</b>                            | 235 mm   9.252 in   |
| <b>Length</b>                           | 2438 mm   95.984 in |
| <b>Net Weight, without mounting kit</b> | 66 kg   145.505 lb  |

## Array Layout

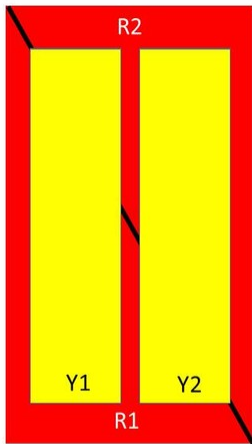


| Array | Freq (MHz) | Conns | RET (SRET) | AISG RET UID         |
|-------|------------|-------|------------|----------------------|
| R1    | 698-798    | 1-2   | 1          | ANxxxxxxxxxxxxxxxxx1 |
| R2    | 824-894    | 3-4   | 2          | ANxxxxxxxxxxxxxxxxx2 |
| Y1    | 1695-2360  | 5-6   | 3          | ANxxxxxxxxxxxxxxxxx3 |
| Y2    | 1695-2360  | 7-8   |            |                      |

Left Right  
Bottom

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

# JAHH-33C-R3B

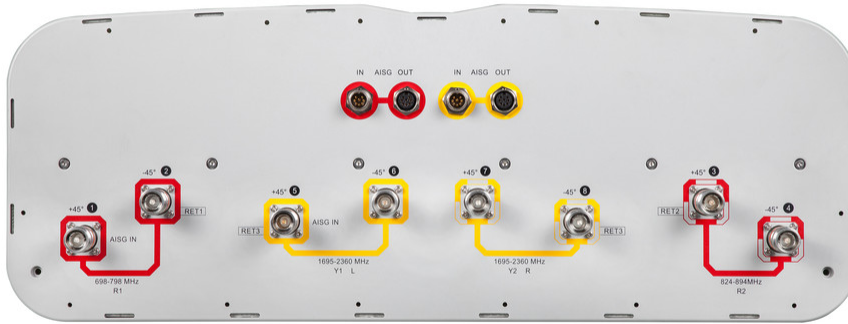

## Electrical Specifications

|                                   |   |
|-----------------------------------|---|
| <b>Impedance</b>                  | 50 ohm  |
| <b>Operating Frequency Band</b>   | 1695 – 2360 MHz   698 – 798 MHz   824 – 894 MHz |
| <b>Polarization</b>               | ±45°  |
| <b>Total Input Power, maximum</b> | 800 W @ 50 °C                                   |

## Electrical Specifications

| Frequency Band, MHz                      | 698–798 | 824–894 | 1695–1880 | 1850–1990 | 1920–2200 | 2300–2360 |
|--|---------|---------|-----------|-----------|-----------|-----------|
| <b>Gain, dBi</b>                         | 18.3    | 19      | 19.8      | 20.2      | 20.6      | 21.4      |
| <b>Beamwidth, Horizontal, degrees</b>    | 36      | 32      | 34        | 34        | 33        | 29        |
| <b>Beamwidth, Vertical, degrees</b>      | 9.5     | 8.6     | 5.8       | 5.4       | 5         | 4.6       |
| <b>Beam Tilt, degrees</b>                | 0–10    | 0–10    | 2–12      | 2–12      | 2–12      | 2–12      |
| <b>Horizontal Sidelobe, dB</b>           | 21      | 20      | 20        | 18        | 18        | 19        |
| <b>USLS (First Lobe), dB</b>             | 18      | 21      | 17        | 18        | 18        | 20        |
| <b>Front-to-Back Ratio at 180°, dB</b>   | 32      | 39      | 35        | 37        | 38        | 36        |
| <b>Isolation, Cross Polarization, dB</b> | 25      | 25      | 25        | 25        | 25        | 25        |
| <b>Isolation, Inter-band, dB</b>         | 30      | 30      | 30        | 30        | 30        | 30        |

# JAHH-33C-R3B

|   |          |          |          |          |          |          |
|---|----------|----------|----------|----------|----------|----------|
| <b>VSWR   Return loss, dB</b>                       | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 |
| <b>PIM, 3rd Order, 2 x 20 W, dBc</b>                | -153     | -153     | -153     | -153     | -153     | -153     |
| <b>Input Power per Port at 50°C, maximum, watts</b> | 150      | 150      | 250      | 250      | 250      | 200      |

## Electrical Specifications, BASTA

| <b>Frequency Band, MHz</b>                         | <b>698–798</b>                 | <b>824–894</b>                 | <b>1695–1880</b>               | <b>1850–1990</b>               | <b>1920–2200</b>               | <b>2300–2360</b>               |
|--|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| <b>Gain by all Beam Tilts, average, dBi</b>        | 18                             | 18.8                           | 19.4                           | 20                             | 20.3                           | 21.1                           |
| <b>Gain by all Beam Tilts Tolerance, dB</b>        | ±0.4                           | ±0.3                           | ±0.6                           | ±0.3                           | ±0.5                           | ±0.5                           |
| <b>Gain by Beam Tilt, average, dBi</b>             | 0° 17.9<br>5° 18.1<br>10° 17.9 | 0° 18.7<br>5° 18.9<br>10° 18.8 | 2° 19.1<br>7° 19.5<br>12° 19.4 | 2° 19.7<br>7° 20.1<br>12° 20.0 | 2° 20.0<br>7° 20.4<br>12° 20.3 | 2° 20.8<br>7° 21.3<br>12° 21.8 |
| <b>Beamwidth, Horizontal Tolerance, degrees</b>    | ±3                             | ±0.9                           | ±1.8                           | ±1.3                           | ±1.3                           | ±1.1                           |
| <b>Beamwidth, Vertical Tolerance, degrees</b>      | ±0.5                           | ±0.4                           | ±0.3                           | ±0.2                           | ±0.3                           | ±0.2                           |
| <b>USLS, beampeak to 20° above beampeak, dB</b>    | 18                             | 17                             | 15                             | 16                             | 16                             | 16                             |
| <b>Front-to-Back Total Power at 180° ± 30°, dB</b> | 29                             | 28                             | 29                             | 30                             | 30                             | 31                             |
| <b>CPR at Boresight, dB</b>                        | 18                             | 18                             | 19                             | 23                             | 22                             | 22                             |
| <b>CPR at Sector, dB</b>                           | 9                              | 15                             | 12                             | 14                             | 12                             | 12                             |

## Mechanical Specifications

|   |   |
|---|---|
| <b>Wind Loading @ Velocity, frontal</b> | 954.0 N @ 150 km/h (214.5 lbf @ 150 km/h)   |
| <b>Wind Loading @ Velocity, lateral</b> | 355.0 N @ 150 km/h (79.8 lbf @ 150 km/h)    |
| <b>Wind Loading @ Velocity, maximum</b> | 1,434.0 N @ 150 km/h (322.4 lbf @ 150 km/h) |
| <b>Wind Loading @ Velocity, rear</b>    | 1,086.0 N @ 150 km/h (244.1 lbf @ 150 km/h) |
| <b>Wind Speed, maximum</b>              | 241 km/h (150 mph)                          |

## Packaging and Weights

|                       |                      |
|-----------------------|----------------------|
| <b>Width, packed</b>  | 752 mm   29.606 in   |
| <b>Depth, packed</b>  | 382 mm   15.039 in   |
| <b>Length, packed</b> | 2590 mm   101.969 in |
| <b>Weight, gross</b>  | 92.7 kg   204.368 lb |

## Regulatory Compliance/Certifications

# JAHH-33C-R3B

---

## Agency

CHINA-ROHS

ISO 9001:2015

ROHS

UK-ROHS

## Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant/Exempted

Compliant/Exempted



## Included Products

- |           |   |  |
|-----------|---|--|
| BSAMNT-4  | - | Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set. |
| BSAMNT-M4 | - | Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.                            |

## \* Footnotes

### Performance Note

Severe environmental conditions may degrade optimum performance