

RRZZVVT4S4-65B-R8



28-port sector antenna, 4x 694-960, 4x 1427-2690 and 4x 1695-2690 MHz 65° HPBW, 8x 2300-2690 and 8x 3300-3800MHz, 90° HPBW, 8x RET

- Also includes 1x 4-Column Array for 2300-2690 MHz and a separate 1x 4-Column Array for 3300-3800MHz. Column spacing optimized to support Soft Split Beamforming
- Includes eight Internal RET's
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios
- New end cap shape for additional wind load reduction
- 4 M-LOC cluster connectors for the two planar beamforming arrays

General Specifications

| | |
|---|--|
| Antenna Type | Sector- and beamforming |
| Band | Multiband |
| Calibration Connector Interface | M-LOC |
| Calibration Connector Quantity | 2 |
| Color | Light Gray (RAL 7035) |
| Grounding Type | RF connector inner conductor and body grounded to reflector and mounting bracket |
| Performance Note | Outdoor usage |
| Radome Material | Fiberglass, UV resistant |
| Reflector Material | Aluminum |
| RF Connector Interface | 4.3-10 Female M-LOC |
| RF Connector Location | Bottom |
| RF Connector Quantity, high band | 16 |
| RF Connector Quantity, mid band | 8 |
| RF Connector Quantity, low band | 4 |
| RF Connector Quantity, total | 28 |

Remote Electrical Tilt (RET) Information

| | |
|--------------------------------|---|
| RET Hardware | CommRET v2 |
| RET Interface | AISG1 8-pin DIN Female AISG1 8-pin DIN Male |
| RET Interface, quantity | 2 female 2 male |


RRZZVVT4S4-65B-R8

| | |
|---|---|
| Input Voltage | 10–30 Vdc |
| Internal RET | High band (2) Low band (2) Mid band (4) |
| Power Consumption, active state, maximum | 8 W |
| Power Consumption, idle state, maximum | 1 W |
| Protocol | 3GPP/AISG 2.0 (Single RET) |

Dimensions

| | |
|---------------------------------|---------------------|
| Width | 498 mm 19.606 in |
| Depth | 197 mm 7.756 in |
| Length | 2180 mm 85.827 in |
| Net Weight, antenna only | 48 kg 105.822 lb |

Array Layout

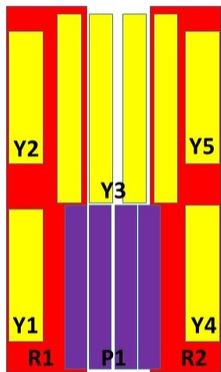


| Array | Freq (MHz) | Conns | RET (SRET) | AISG RET UID |
|-------|------------|-------|------------|----------------------|
| R1 | 694-960 | 1-2 | 1 | CPxxxxxxxxxxxxxxxxR1 |
| R2 | 694-960 | 3-4 | 2 | CPxxxxxxxxxxxxxxxxR2 |
| Y1 | 1427-2690 | 5-6 | 3 | CPxxxxxxxxxxxxxxxxY1 |
| Y2 | 1695-2690 | 7-8 | 4 | CPxxxxxxxxxxxxxxxxY2 |
| Y3 | 2300-2690 | 9-16 | 5 | CPxxxxxxxxxxxxxxxxY3 |
| Y4 | 1427-2690 | 17-18 | 6 | CPxxxxxxxxxxxxxxxxY4 |
| Y5 | 1695-2690 | 19-20 | 7 | CPxxxxxxxxxxxxxxxxY5 |
| P1 | 3300-3800 | 21-28 | 8 | CPxxxxxxxxxxxxxxxxP1 |

Left Bottom Right

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

RRZZVVT4S4-65B-R8

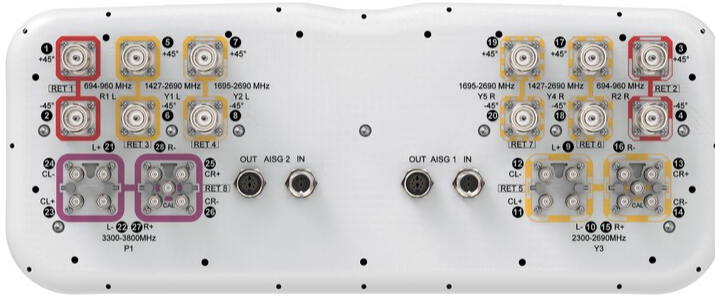

Electrical Specifications

| | |
|-----------------------------------|---|
| Impedance | 50 ohm |
| Operating Frequency Band | 1427 – 2690 MHz 1695 – 2690 MHz 2300 – 2690 MHz 3300 – 3800 MHz 694 – 960 MHz |
| Polarization | ±45° |
| Total Input Power, maximum | 2,200 W @ 50 °C |

Electrical Specifications

| Frequency Band, MHz | 698–806 | 790–896 | 890–960 |
|--|---------|---------|---------|
| Beamwidth, Horizontal, degrees | 69 | 63 | 61 |
| Beamwidth, Vertical, degrees | 10.2 | 9.3 | 8.6 |
| Beam Tilt, degrees | 2–12 | 2–12 | 2–12 |
| USLS (First Lobe), dB | 17 | 19 | 20 |
| Front-to-Back Ratio at 180°, dB | 31 | 29 | 29 |
| Front-to-Back Total Power at 180° ± 30°, dB | 21 | 21 | 23 |
| CPR at Boresight, dB | 20 | 20 | 21 |

RRZZVVT4S4-65B-R8

| | | | |
|---|----------|----------|----------|
| CPR at Sector, dB | 11 | 10 | 12 |
| Isolation, Cross Polarization, dB | 28 | 28 | 28 |
| Isolation, Inter-band, dB | 28 | 28 | 28 |
| VSWR Return loss, dB | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 |
| PIM, 3rd Order, 2 x 20 W, dBc | -150 | -150 | -150 |
| Input Power per Port at 50°C, maximum, watts | 300 | 300 | 300 |

Electrical Specifications, BASTA

| | | | |
|---|----------------|----------------|----------------|
| Frequency Band, MHz | 698–806 | 790–896 | 890–960 |
| Gain by all Beam Tilts, average, dBi | 14.9 | 15.2 | 15.4 |
| Gain by all Beam Tilts Tolerance, dB | ±0.4 | ±0.3 | ±0.4 |
| Beamwidth, Horizontal Tolerance, degrees | ±4.2 | ±4.2 | ±2.7 |
| Beamwidth, Vertical Tolerance, degrees | ±0.7 | ±0.7 | ±0.6 |
| USLS, beampeak to 20° above beampeak, dB | 17 | 18 | 18 |

Electrical Specifications

| | | | | | |
|--|------------------|------------------|------------------|------------------|------------------|
| Frequency Band, MHz | 1427–1518 | 1695–1990 | 1920–2300 | 2300–2500 | 2490–2690 |
| Beamwidth, Horizontal, degrees | 82 | 69 | 68 | 63 | 63 |
| Beamwidth, Vertical, degrees | 10.1 | 8.2 | 7.2 | 6.3 | 5.7 |
| Beam Tilt, degrees | 2–12 | 2–12 | 2–12 | 2–12 | 2–12 |
| USLS (First Lobe), dB | 15 | 15 | 18 | 17 | 17 |
| Front-to-Back Ratio at 180°, dB | 31 | 32 | 28 | 33 | 33 |
| Front-to-Back Total Power at 180° ± 30°, dB | 25 | 25 | 23 | 26 | 25 |
| CPR at Boresight, dB | 18 | 18 | 20 | 17 | 14 |
| CPR at Sector, dB | 9 | 7 | 4 | 6 | -1 |
| Isolation, Cross Polarization, dB | 25 | 25 | 25 | 25 | 25 |
| Isolation, Inter-band, dB | 25 | 25 | 25 | 25 | 25 |
| VSWR Return loss, dB | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 |

RRZZVVT4S4-65B-R8

| | | | | | |
|---|------|------|------|------|------|
| PIM, 3rd Order, 2 x 20 W, dBc | -150 | -150 | -150 | -150 | -150 |
| Input Power per Port at 50°C, maximum, watts | 250 | 250 | 250 | 200 | 200 |

Electrical Specifications, BASTA

| Frequency Band, MHz | 1427–1518 | 1695–1990 | 1920–2300 | 2300–2500 | 2490–2690 |
|---|------------------|------------------|------------------|------------------|------------------|
| Gain by all Beam Tilts, average, dBi | 14.2 | 15.6 | 16.1 | 16.8 | 16.8 |
| Gain by all Beam Tilts Tolerance, dB | ±0.8 | ±0.6 | ±0.6 | ±0.5 | ±0.4 |
| Beamwidth, Horizontal Tolerance, degrees | ±9.4 | ±6 | ±6.2 | ±4.2 | ±5.8 |
| Beamwidth, Vertical Tolerance, degrees | ±0.8 | ±0.7 | ±0.7 | ±0.4 | ±0.3 |
| USLS, beampeak to 20° above beampeak, dB | 15 | 15 | 18 | 17 | 16 |

Electrical Specifications

| Frequency Band, MHz | 1695–1990 | 1920–2300 | 2300–2500 | 2490–2690 |
|---|------------------|------------------|------------------|------------------|
| Beamwidth, Horizontal, degrees | 76 | 70 | 59 | 57 |
| Beamwidth, Vertical, degrees | 9.3 | 8.3 | 7.3 | 6.8 |
| Beam Tilt, degrees | 2–12 | 2–12 | 2–12 | 2–12 |
| USLS (First Lobe), dB | 15 | 16 | 18 | 18 |
| Front-to-Back Ratio at 180°, dB | 32 | 31 | 31 | 30 |
| Front-to-Back Total Power at 180° ± 30°, dB | 23 | 24 | 26 | 23 |
| CPR at Boresight, dB | 16 | 19 | 22 | 18 |
| CPR at Sector, dB | 6 | 6 | 7 | 4 |
| Isolation, Cross Polarization, dB | 25 | 25 | 25 | 25 |
| Isolation, Inter-band, dB | 25 | 25 | 25 | 25 |
| VSWR Return loss, dB | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 |
| PIM, 3rd Order, 2 x 20 W, dBc | -150 | -150 | -150 | -150 |
| Input Power per Port at 50°C, maximum, watts | 250 | 250 | 200 | 200 |

Electrical Specifications, BASTA

| Frequency Band, MHz | 1695–1990 | 1920–2300 | 2300–2500 | 2490–2690 |
|----------------------------|------------------|------------------|------------------|------------------|
|----------------------------|------------------|------------------|------------------|------------------|

RRZZVVT4S4-65B-R8

| | | | | |
|--|------|-------|------|------|
| Gain by all Beam Tilts, average, dBi | 14.3 | 15.3 | 16.3 | 16.4 |
| Gain by all Beam Tilts Tolerance, dB | ±0.7 | ±1 | ±0.6 | ±0.5 |
| Beamwidth, Horizontal Tolerance, degrees | ±7.8 | ±10.6 | ±2.8 | ±2.4 |
| Beamwidth, Vertical Tolerance, degrees | ±0.8 | ±0.8 | ±0.5 | ±0.4 |
| USLS, beampeak to 20° above beampeak, dB | 13 | 14 | 16 | 15 |

Electrical Specifications

| Frequency Band, MHz | 2300–2500 | 2490–2690 | 3300–3600 | 3600–3800 |
|---|------------|------------|------------|------------|
| Beamwidth, Horizontal, degrees | 92 | 90 | 93 | 87 |
| Beamwidth, Vertical, degrees | 5.8 | 5.4 | 6.3 | 5.9 |
| Beam Tilt, degrees | 2–12 | 2–12 | 2–12 | 2–12 |
| USLS (First Lobe), dB | 16 | 17 | 17 | 16 |
| Front-to-Back Ratio at 180°, dB | 32 | 30 | 30 | 30 |
| Front-to-Back Total Power at 180° ± 30°, dB | 22 | 22 | 23 | 23 |
| Coupling level, Amp, Antenna port to Cal port, dB | -26 | -26 | -26 | -26 |
| Coupling level, max Amp Δ, Antenna port to Cal port, dB | ±2 | ±2 | ±2 | ±2 |
| Coupler, max Amp Δ, Antenna port to Cal port, dB | 0.9 | 0.9 | 0.9 | 0.9 |
| Coupler, max Phase Δ, Antenna port to Cal port, degrees | 7 | 7 | 7 | 7 |
| CPR at Boresight, dB | 16 | 16 | 17 | 17 |
| CPR at Sector, dB | 12 | 8 | 9 | 6 |
| Isolation, Cross Polarization, dB | 25 | 25 | 25 | 25 |
| Isolation, Inter-band, dB | 25 | 25 | 25 | 25 |
| Isolation, Co-polarization, dB | 20 | 20 | 20 | 20 |
| VSWR Return loss, dB | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 |
| PIM, 3rd Order, 2 x 20 W, dBc | -140 | -140 | -140 | -140 |
| Input Power per Port at 50°C, | 150 | 150 | 75 | 75 |

RRZZVVT4S4-65B-R8

maximum, watts

Electrical Specifications, BASTA

| Frequency Band, MHz | 2300–2500 | 2490–2690 | 3300–3600 | 3600–3800 |
|--|-----------|-----------|-----------|-----------|
| Gain by all Beam Tilts, average, dBi | 14.7 | 14.6 | 15.3 | 15.5 |
| Gain by all Beam Tilts Tolerance, dB | ±0.7 | ±0.6 | ±0.7 | ±0.7 |
| Beamwidth, Horizontal Tolerance, degrees | ±20.7 | ±11.7 | ±14 | ±13.2 |
| Beamwidth, Vertical Tolerance, degrees | ±0.3 | ±0.3 | ±0.5 | ±0.4 |
| USLS, beampeak to 20° above beampeak, dB | 11 | 13 | 15 | 14 |

Electrical Specifications, Broadcast 65°

| Frequency Band, MHz | 2300–2500 | 2490–2690 | 3300–3600 | 3600–3800 |
|---|-----------|-----------|-----------|-----------|
| Gain, dBi | 17.6 | 17.8 | 18.5 | 18.5 |
| Beamwidth, Horizontal, degrees | 65 | 65 | 65 | 65 |
| Beamwidth, Vertical, degrees | 5.9 | 5.5 | 6.4 | 6 |
| Front-to-Back Total Power at 180° ± 30°, dB | 26 | 26 | 27 | 27 |
| USLS (First Lobe), dB | 17 | 19 | 23 | 21 |

Electrical Specifications, Service Beam

| Frequency Band, MHz | 2300–2500 | 2490–2690 | 3300–3600 | 3600–3800 |
|---|-----------|-----------|-----------|-----------|
| Steered 0° Gain, dBi | 20.4 | 20.4 | 21 | 20.9 |
| Steered 0° Beamwidth, Horizontal, degrees | 26 | 25 | 25 | 24 |
| Steered 0° Front-to-Back Total Power at 180° ± 30°, dB | 30 | 31 | 31 | 29 |
| Steered 0° Horizontal Sidelobe, dB | 14 | 14 | 14 | 13 |
| Steered 30° Gain, dBi | 19.4 | 19.8 | 20 | 20.2 |
| Steered 30° Beamwidth, Horizontal, degrees | 30 | 27 | 29 | 25 |
| Steered 30° Front-to-Back Total Power at 180° ± 30°, dB | 28 | 29 | 28 | 28 |

RRZZVVT4S4-65B-R8

Electrical Specifications, Soft Split

| Frequency Band, MHz | 2300–2500 | 2490–2690 | 3300–3600 | 3600–3800 |
|---|-----------|-----------|-----------|-----------|
| Gain, dBi | 19.3 | 19.4 | 19.9 | 20.3 |
| Beamwidth, Horizontal, degrees | 34 | 32 | 32 | 28 |
| Front-to-Back Total Power at 180° ± 30°, dB | 29 | 30 | 27 | 28 |
| Horizontal Sidelobe, dB | 17 | 17 | 17 | 18 |

Mechanical Specifications

| | |
|----------------------------------|---|
| Wind Loading @ Velocity, frontal | 741.0 N @ 150 km/h (166.6 lbf @ 150 km/h) |
| Wind Loading @ Velocity, lateral | 194.0 N @ 150 km/h (43.6 lbf @ 150 km/h) |
| Wind Loading @ Velocity, maximum | 985.0 N @ 150 km/h (221.4 lbf @ 150 km/h) |
| Wind Loading @ Velocity, rear | 510.0 N @ 150 km/h (114.7 lbf @ 150 km/h) |
| Wind Speed, maximum | 241 km/h (150 mph) |

Packaging and Weights

| | |
|----------------|----------------------|
| Width, packed | 565 mm 22.244 in |
| Depth, packed | 368 mm 14.488 in |
| Length, packed | 2359 mm 92.874 in |
| Weight, gross | 61.9 kg 136.466 lb |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |



Included Products

- BSAMNT-4 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

* Footnotes

RRZZVVT4S4-65B-R8

Performance Note Severe environmental conditions may degrade optimum performance